

- Unit Volume / Weight

- Anchor Type : T-025-0170
Anchor Length : 170mm
dia : 14mm
Foot dia : 35mm
Load Class : 2.5 tonnes

Prior to lifting older / pre-used blocks, check the lifting pin for wear / corrosion and check the block for cracks. If the block is cracked or the pin is worn, it could fail when lifting.


- Characteristic 28 day cube strength = 50 N/mm² min.
- Concrete is Class A1 Fire Resistant in accordance with clause 4.3.4.4 of EN 13369

- Manufactured to : BS EN 13369 : 2013
- Tolerances to : BS EN 13670 : 2009


- Appearance : Grey in Colour
- Other Chemical Properties : Not Applicable

- Design Life : >100 years

- Length ±5mm
- Width ±5mm
- Height ±5mm

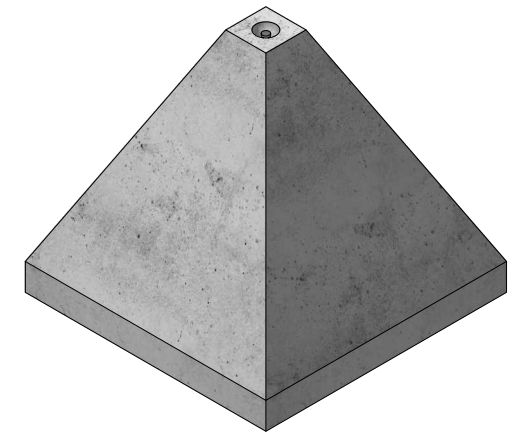

✓ $\varnothing 74\text{mm}$ dia semi-spherical recess in the gravitational centre of the block for the pin anchor.
(pin anchor is rated to 2.5 tonnes with a safety factor of 3).

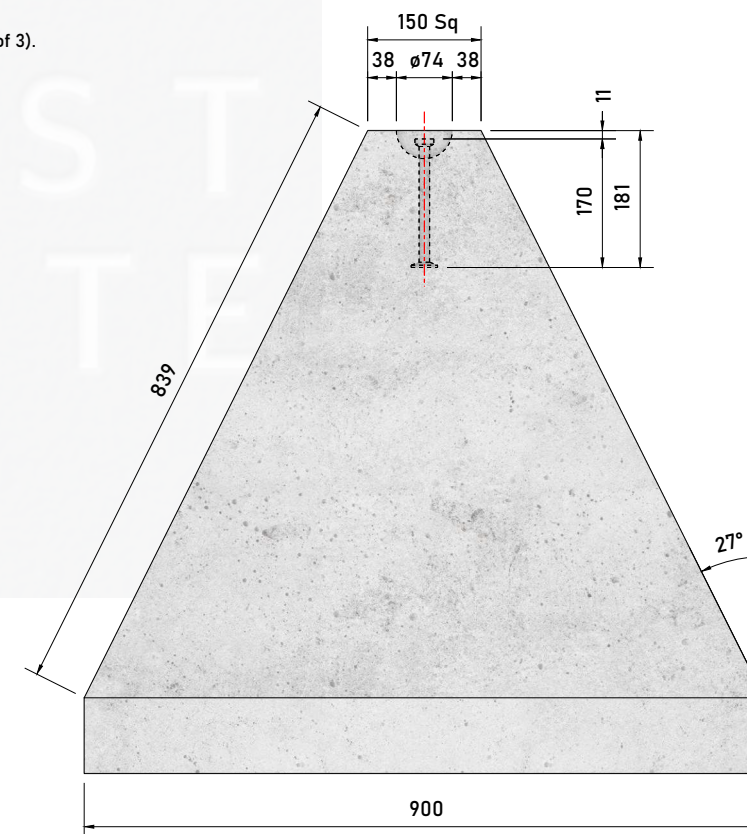

											TITLE 900mm x 900mm x 850mm Concrete Tank Trap Block (Single) Elite Product Code : STTPB				ELITE PRECAST CONCRETE LTD HALESFIELD 9, TELFORD SHROPSHIRE TF7 4QW www.eliteprecast.co.uk												
					0	14.02.23	First Issue		CTC	RMD			DRN	CTC	CHKD	RMD	DATE	14-02-23	SIZE	A3	SCALE	1:10	DRG	STTPB	REV	0	
REV	DATE	REASON FOR ISSUE					DRN	APP	REV	DATE	REASON FOR ISSUE					DRN	APP										